

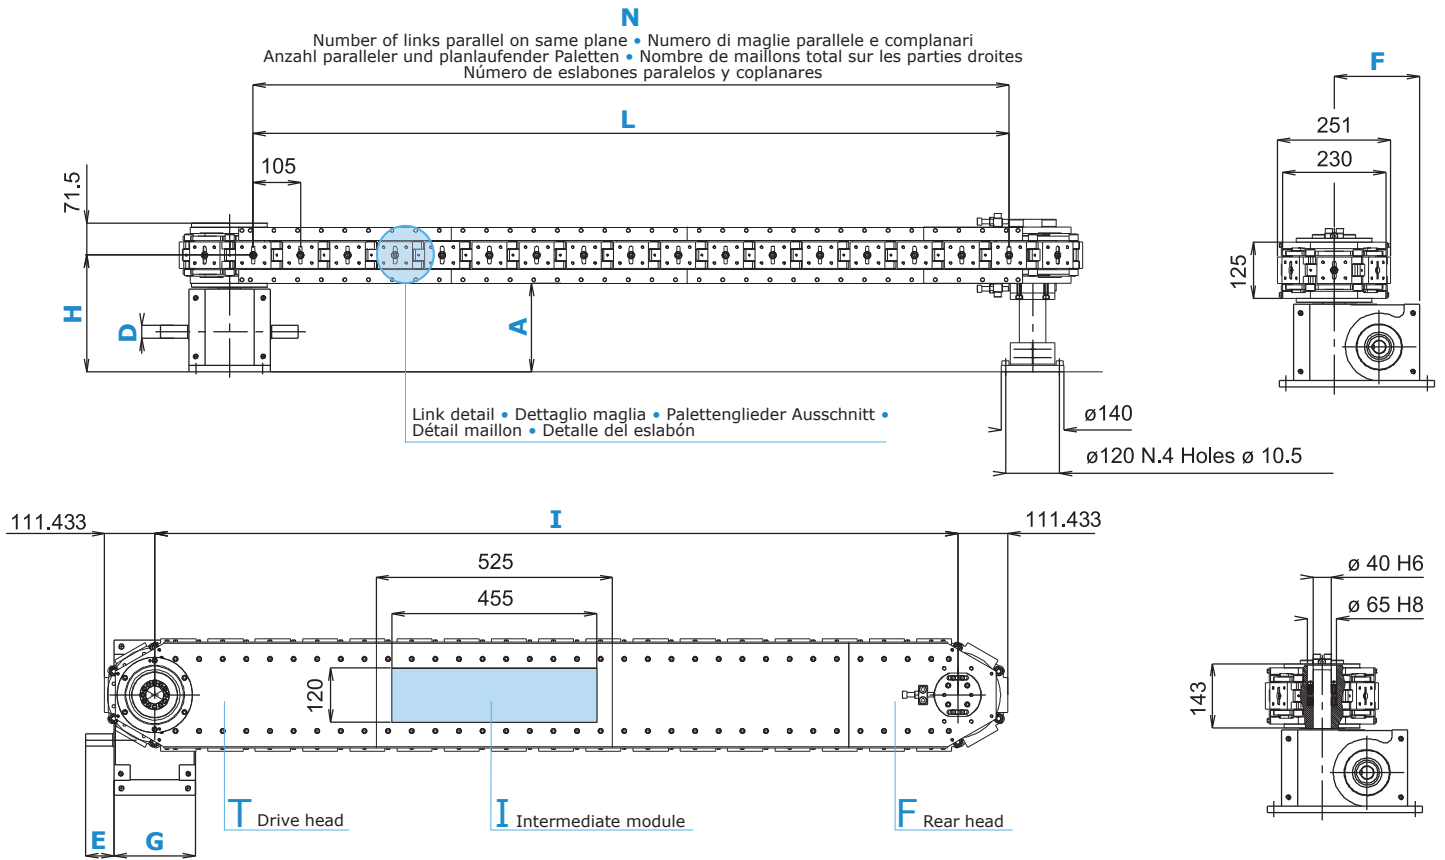


TL 105

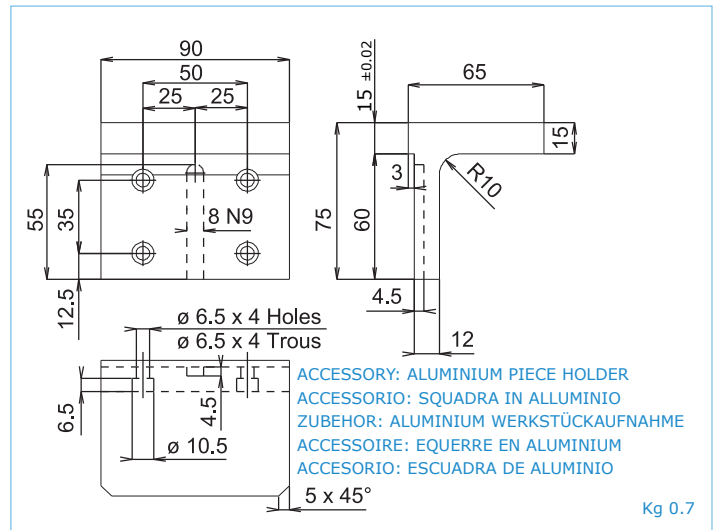

Area available on each element for tooling through opening • Area disponibile in ogni modulo per lavorazioni o per apertura passante • Verfügbar sind Werkzeuge oder Öffnungen auf den einzelnen Flächen der Elementen • Surface disponible sur chaque module pour montages appuis de fixation ou passage • Area disponible en cada módulo para elaboración o apertura pasante

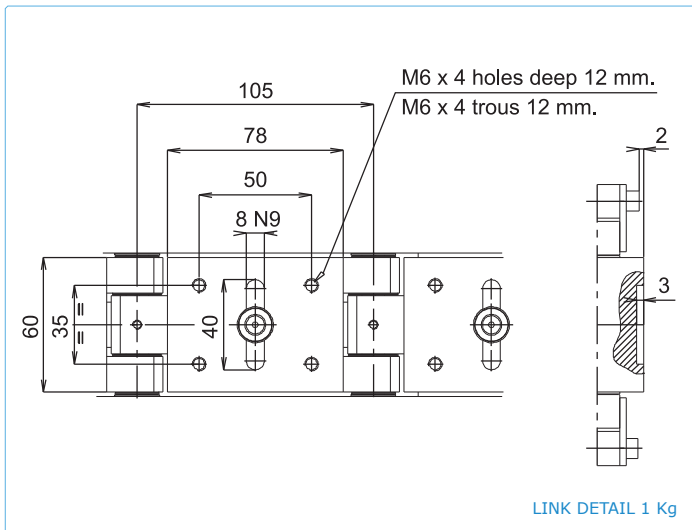

TL 105

k	INDEX DRIVE		
	IGA 80	IGA 100	IGA 125
D(k6)	24	28	32
E	53	63	83
F	160	190	255
G	160	180	220
H	234.5	259.5	291.5
A	172	197	229

INDEX DISTANCE	
Stops	Stroke [mm]
6	105
3	210

N° Pallet	MODULES COMPOSITION	I (mm)	L (mm)	N	Kg
20	T+F	735	630	7+7	128
30	T+I+F	1260	1155	12+12	193
40	T+I+I+F	1785	1680	17+17	258
50	T+I+I+I+F	2310	2205	22+22	323
60	T+I+I+I+I+F	2835	2730	27+27	388
70	T+I+I+I+I+I+F	3360	3255	32+32	453
80	T+I+I+I+I+I+I+F	3885	3780	37+37	518
90	T+I+I+I+I+I+I+I+F	4410	4305	42+42	583
100	T+I+I+I+I+I+I+I+I+F	4935	4830	47+47	648

Please consult CDS to recommend appropriate index drive and for longer lengths • Consultare CDS per determinare la corretta unità index e per lunghezze superiori •
 CDS gibt gerne Auskunft über die Getriebetypen und für größere Längen • Pour déterminer l'indexeur correct et pour des longueurs supérieure s'adresser au CDS •
 Consultar a CDS para determinar la correcta unidad index y para longitudes más largas