


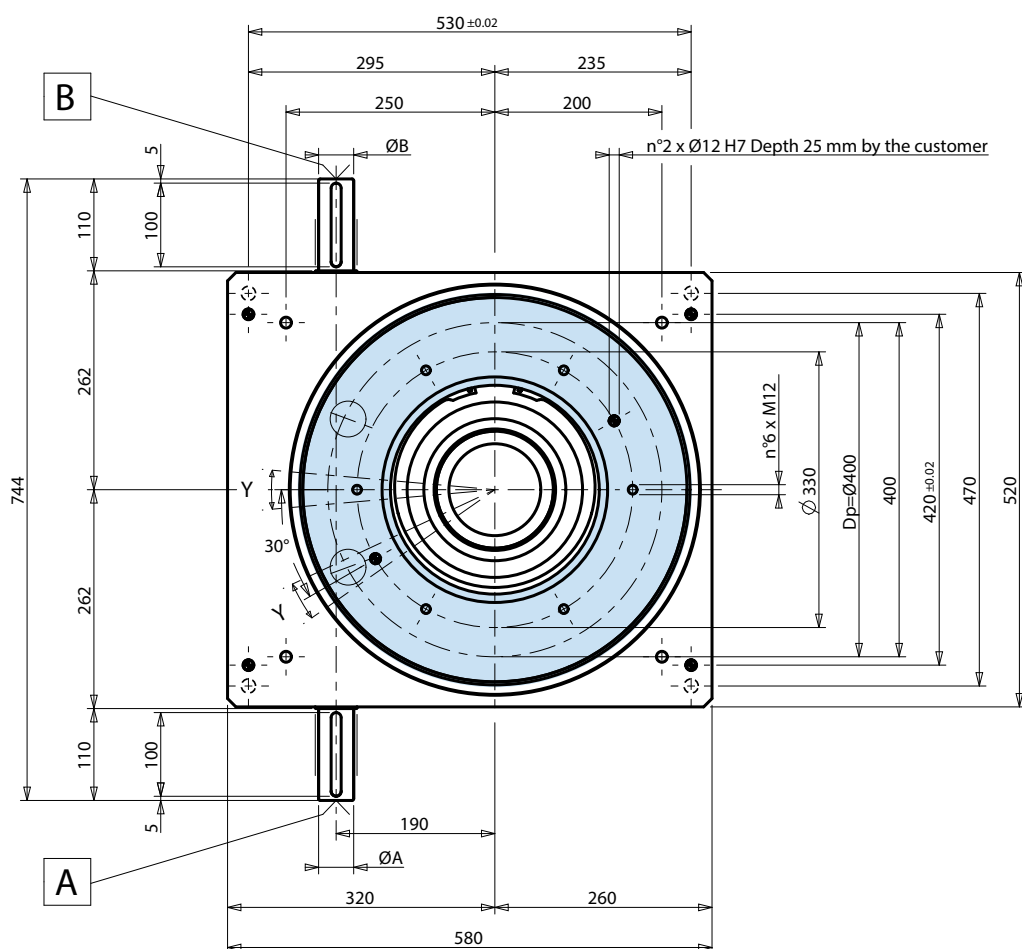


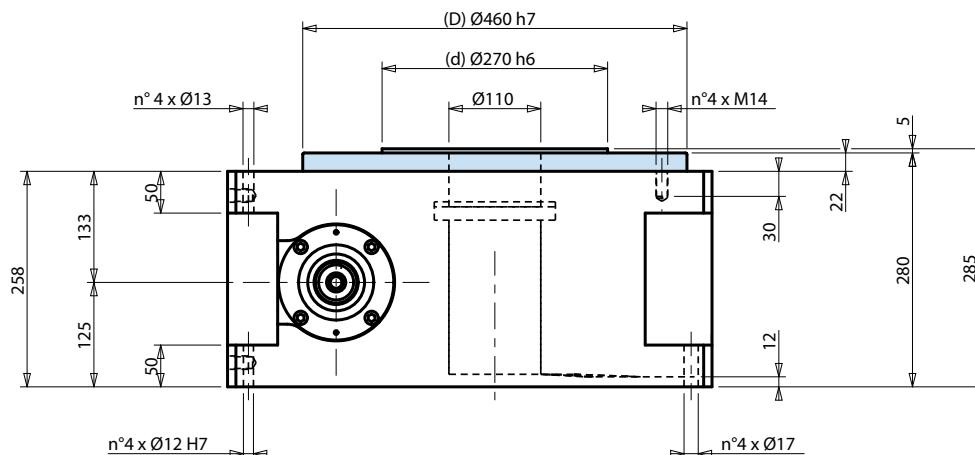




TR

C999/0/TR - 11/2020



Rotating element • Elemento rotante • Drehelement • Élément tournant • Elemento de giro

<div>TR 400</div> <div><div> 322 Kg 709.9 Lbs</div><div></div></div>	<div>A-B</div> <div></div>					Reference Riferimento Bezug Référence Referencia	Concentricity Concentricità Konzentrizität Concentricité Concentricidad	Planarity Planarità Planheit Planéité Planaridad	Repeatability Ripetibilità Wiederholbarkeit Répétitivité Repetibilidad			Threaded holes position Posizione fori filettati Löcherposition Position des trou taraudé Posición orificios roscados
									Std	2 Cycles	3 Cycles	
		d1	a	b	c	d	±0.02mm			*		
	Ø1	42 k6	45	12	8	D		±0.02mm				
	Ø2	50	53.5	14	9	Rp			±0.006°	±0.009°	±0.012°	

Tolerance in compliance with • Tolleranze secondo • Toleranzen gemäß • Tolérances selon • Tolerancias con arreglo a  
UNI - ISO 2768-1 • EN 22768-1